

## PRODUCT INFORMATION SHEET

**DESCRIPTION:** 190mm Hollow 40MPa

**PRODUCT CODE**: 20-01 (M20010LAMPA40ST)

**DIMENSIONS:** 190 x 190 x 390 mm (W x H x L) (+/- Tolerance to AS 4455.1)

Minimum face shell thickness 30mm

**STRENGTH:** Characteristic Unconfined Compressive Strength ≥ 40 MPa


**FIRE RESISTANCE:** 60(Srf ≤ 18) / 60 / 90 (D.T.S. as per AS3700 Sec. 6)

90(Srf ≤ 17) / 90 / 90 (D.T.S. as per AS3700 Sec. 6)

**DURABILITY:** General Purpose

**WEIGHT:** 17.5 Kg <u>+</u>10% **NO. PER PALLET:** 108 Units **NO. PER M<sup>2</sup>:** 12.5 Units

## **ACOUSTIC DESIGN:**

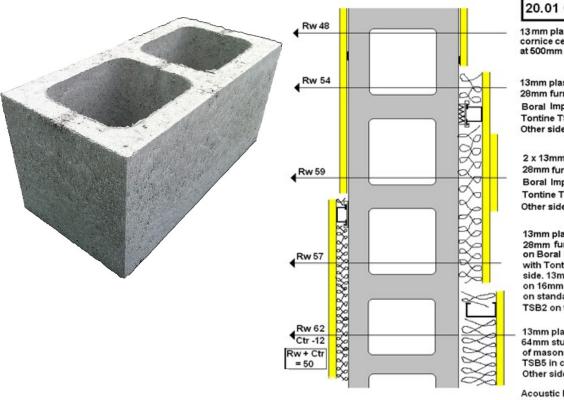

## 20.01 Opinions

13 mm plasterboard on cornice cement daubs at 500mm crs. (both sides)

13mm plasterboard on 28mm furring channels, on Boral Impact Clips, with Tontine TSB3 in cavity. Other side daub fixed.

2 x 13mm plasterboard on 28mm furring channels, on Boral Impact Clips, with Tontine TSB3 in cavity. Other side daub fixed.

13mm plasterboard on 28mm furring channels, on Boral Impact Clips with Tontine TSB3 on one side. 13mm plasterboard on 16mm furring channels on standard clips with TSB2 on the other side.

13mm plasterboard on 64mm studs, 20mm clear of masonry, with Tontine TSB5 in cavity on one side. Other side as above.

Acoustic Rating Opinions Wilkinson Murray Pty Ltd